


PICTURE




KL-P1040T/R-H07

OUTLINE DIMENSIONS (UNIT: mm)

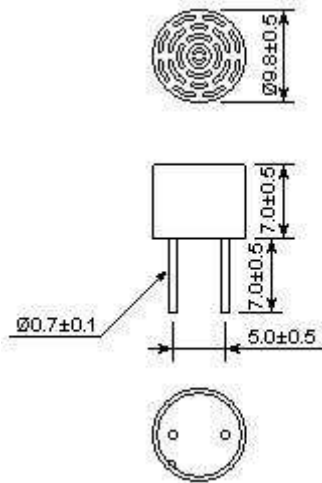

Directivity in Overall Sensitivity

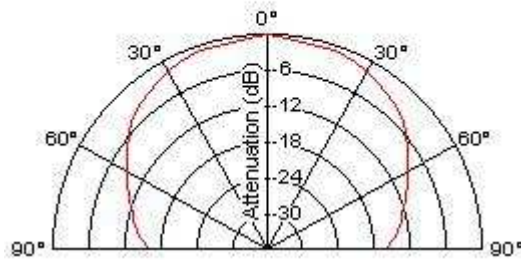

CHARACTERISTICS

Part number	KL-P1040T-H07	KL-P1040R-H07
Construction	Open structure type	Open structure type
Using Method	Transmitter	Receiver
Center frequency	40.0±1.0KHz	40.0±1.0KHz
Sound pressure level	108dB min.	-----
Sensitivity	-----	-76dB min.
Capacitance	2500Pf±20%	2500Pf±20%
Maximum input voltage	20Vrms	20Vrms
Directivity	80°±15°(-6dB)	80°±15°(-6dB)
Operating temperature	-20 °C~+70 °C	-20 °C~+70 °C
Storage Temperature	-40 °C~+85 °C	-40 °C~+85 °C