

JIANGSU WUJIN KAILI ELECTRONIC FACTORY

SPECIFICATION SHEET


ELECTRONIC SPECIFICATION:



HCT8530B SERIES:

Type	HCT8530B01	HCT8530B03	HCT8530B05
Rated Voltage (V)	1.5	3.6	5
Operating Voltage (V)	1.3~2	2.5~4.5	3~7
Rated Current (MA)	< 80	<100	< 100
Coil Resistance (ohm)	7 ± 1.0	16 ± 2	32 ± 3
Sound Output at 10cm (dB)	> 80	> 80	> 80
Resonant Frequency (Hz)	2700 ± 500		
Operating Temperature (°C)	-20~+70	-20~+70	-20~+70
Storage Temperature (°C)	-30~+85	-30~+85	-30~+85
Dimension	8.5*8.5*H3		
Weight (g)	0.8		

Value applying rated voltage (Resonant frequency, 1/2 duty, square wave)

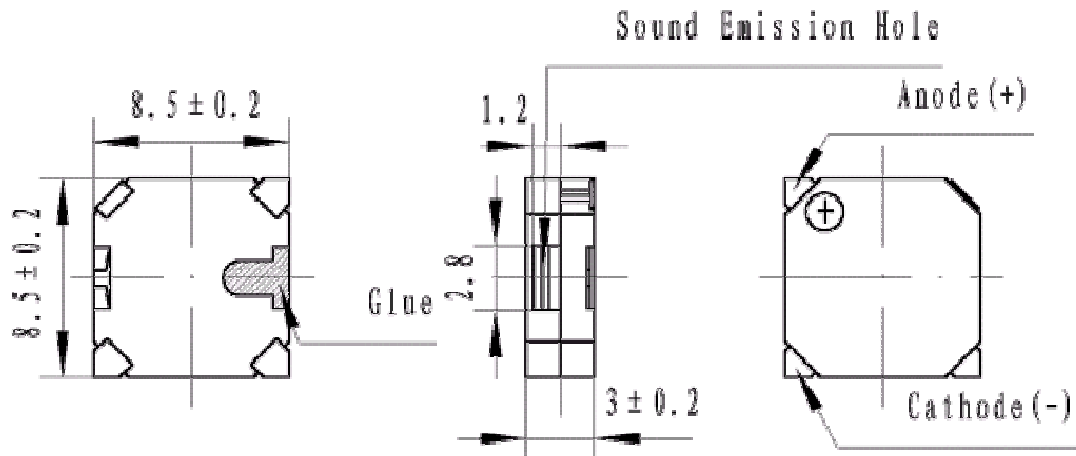

JIANGSU WUJIN KAILI ELECTRONIC FACTORY

Miaoqiao Town, Changzhou city, Jiangsu, China 213167

TEL: 0086-519-86462433; 86712320

FAX: 0086-519-86471336; 86712320

E-mail: kailiec@jmail.com.cn

Http://www.piezo-buzzers.com